


# Verti-Drain® 1517

The lightweight Verti-Drain® 1517 can work to a depth of 6" / 150 mm and is well suited to sensitive turf surfaces. The belt driven machine operates a high speed while giving a neat and consistent hole pattern. An optional rear roller can be added to smooth the surface and leave a neat finish.

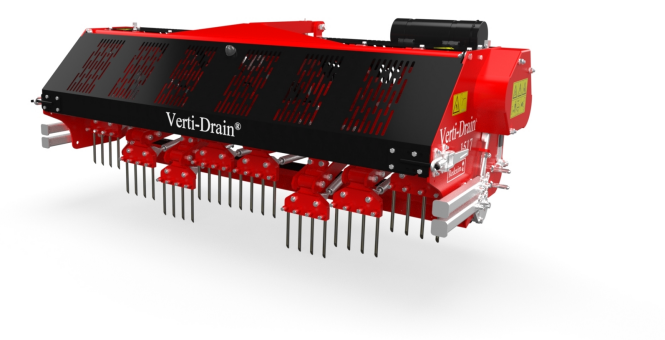

## Specifications

|   |                   |
|---|-------------------|
| SKU   | 111.215.017       |
| Working width (m)   | 1.76              |
| Working width (inch)  | 69                |
| Max. Working depth (mm)                                     | 150               |
| Max. Working depth (inch)                                   | 6                 |
| Working speed at hole spacing 65 mm (km h)                  | 2.12              |
| Working speed at hole spacing 2 1 2 inch (mph)              | 1.3               |
| Weight (kg)   | 520               |
| Weight (lbs)  | 1146              |
| Hole distance with 12 mm tines (mm)                         | 55                |
| Hole distance with 1 2 x 6 inch tines (inch)                | 2.17              |
| Hole spacing distance driving direction (mm)                | 25 - 125          |
| Hole spacing distance driving direction (inch)              | 1                 |
| Max. Diameter solid tine (mm)                               | 12 x 150          |
| Max. Diameter solid tine (inch)                             | 1/2 x 6           |
| Max. Diameter hollow tine (mm)                              | 19 x 150          |
| Max. Diameter hollow tine (inch)                            | 3/4 x 6           |
| Min. Tractor HP required                                    | 28                |
| Min. Lifting capacity 610 mm behind the lifting eyes (kg)   | 600               |
| Min. Lifting capacity 24 inch behind the lifting eyes (lbs) | 1322              |
| Max. capacity with spacing 65 mm (m² hr)                    | 3706              |
| Max. capacity with spacing 2 1 2 inch (ft² hr)              | 39895             |
| Three-point hitch   | 3-point CAT 1     |
| Rpm Max.  | 540               |
| Gear case oil   | 80W90 - 0.9 Liter |
| Lubricant   | EP 2              |
| Dimensions (width mm)                                       | 970               |
| Dimensions (height mm)                                      | 780               |
| Dimensions (length mm)                                      | 2050              |
| Dimensions (width inch)                                     | 38.2              |
| Dimensions (height inch)                                    | 30.7              |
| Dimensions (length inch)                                    | 80.7              |