
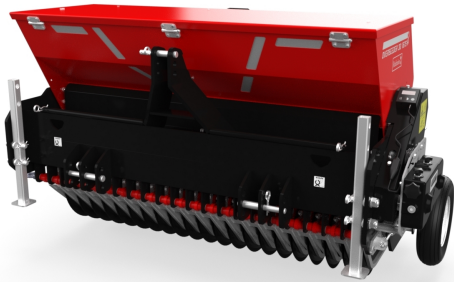


# Overseeder 3D 1575 LV

The Overseeder 3D 1575 LV features an all-new seed delivery mechanism with single-point adjustment. The tough discs cut grooves in the soil for seed to be accurately placed before the roller closes the groove to cover the seed. This lighter weight seeder is suitable for smaller tractors.



### Specifications

|                                                             |                 |
|-------------------------------------------------------------|-----------------|
| SKU                                                         | 122.157.503     |
| Working width (m)                                           | 1.58            |
| Working width (inch)                                        | 62.2            |
| Max. Working depth (mm)                                     | 20              |
| Max. Working speed (km h)                                   | 12              |
| Max. Working speed (mph)                                    | 7.5             |
| Weight (kg)                                                 | 832             |
| Weight (lbs)                                                | 1834            |
| Sowing distance (mm)                                        | 75              |
| Sowing distance (inch)                                      | 2.9             |
| Hopper capacity (L)                                         | 276             |
| Hopper capacity (cu.ft.)                                    | 9.7             |
| Number of seeding elements                                  | 21              |
| Min. Tractor HP required                                    | 40              |
| Min. Lifting capacity 610 mm behind the lifting eyes (kg)   | 832             |
| Min. Lifting capacity 24 inch behind the lifting eyes (lbs) | 1834            |
| Max. capacity ( m² hr)                                      | 18.900          |
| Max. capacity (ft² hr)                                      | 203.438         |
| Three-point hitch                                           | 3-point CAT 1-2 |
| Lubricant                                                   | EP2             |