
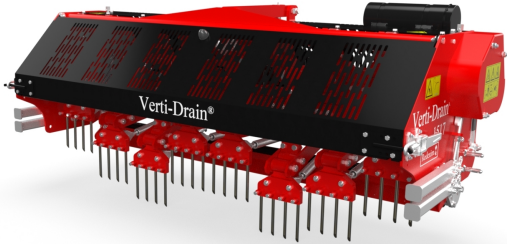


Verti-Drain® 1517

The lightweight Verti-Drain® 1517 can work to a depth of 6" / 150 mm and is well suited to sensitive turf surfaces. The belt driven machine operates a high speed while giving a neat and consistent hole pattern. An optional rear roller can be added to smooth the surface and leave a neat finish.



Specifications

| | |
|---|-------------------|
| SKU | 111.215.017 |
| Working width (m) | 1.76 |
| Working width (inch) | 69 |
| Max. Working depth (mm) | 150 |
| Max. Working depth (inch) | 6 |
| Working speed at hole spacing 65 mm (km h) | 2.12 |
| Working speed at hole spacing 2 1 2 inch (mph) | 1.3 |
| Weight (kg) | 520 |
| Weight (lbs) | 1146 |
| Hole distance with 12 mm tines (mm) | 55 |
| Hole distance with 1 2 x 6 inch tines (inch) | 2.17 |
| Hole spacing distance driving direction (mm) | 25 - 125 |
| Hole spacing distance driving direction (inch) | 1 |
| Max. Diameter solid tine (mm) | 12 x 150 |
| Max. Diameter solid tine (inch) | 1/2 x 6 |
| Max. Diameter hollow tine (mm) | 19 x 150 |
| Max. Diameter hollow tine (inch) | 3/4 x 6 |
| Min. Tractor HP required | 28 |
| Min. Lifting capacity 610 mm behind the lifting eyes (kg) | 600 |
| Min. Lifting capacity 24 inch behind the lifting eyes (lbs) | 1322 |
| Max. capacity with spacing 65 mm (m² hr) | 3706 |
| Max. capacity with spacing 2 1 2 inch (ft² hr) | 39895 |
| Three-point hitch | 3-point CAT 1 |
| Rpm Max. | 540 |
| Gear case oil | 80W90 - 0.9 Liter |
| Lubricant | EP 2 |
| Dimensions (width mm) | 970 |
| Dimensions (height mm) | 780 |
| Dimensions (length mm) | 2050 |
| Dimensions (width inch) | 38.2 |
| Dimensions (height inch) | 30.7 |
| Dimensions (length inch) | 80.7 |