
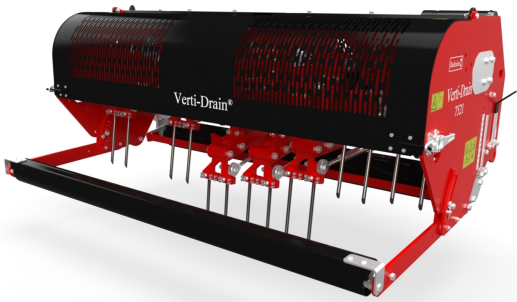


Verti-Drain® 7521

The Verti-Drain® 7521 offers robust functionality and depth in one machine, it has the ability to work to 16" / 400mm deep. The 7521 is popular with contractors and golf clubs in part due to its ability to accept a large range of tines for different applications.



Specifications

| | |
|---|---------------|
| SKU | 7521 |
| Working width (m) | 2.1 |
| Working width (inch) | 83 |
| Max. Working depth (mm) | 400 |
| Max. Working depth (inch) | 16 |
| Weight (kg) | 1375 |
| Weight (lbs) | 3025 |
| Hole distance with 12 mm tines (mm) | 65 |
| Hole distance with 1 2 x 6 inch tines (inch) | 2.5 |
| Hole distance with 24 mm tines (mm) | 129 |
| Hole distance with 1 x 16 inch tines (inch) | 5 |
| Hole spacing distance driving direction (mm) | 50-195 |
| Hole spacing distance driving direction (inch) | 2 - 7-1/2 |
| Max. Diameter solid tine (mm) | 24 x 400 |
| Max. Diameter solid tine (inch) | 1 x 16 |
| Max. Diameter hollow tine (mm) | 32 x 300 |
| Max. Diameter hollow tine (inch) | 1-1/4 x 12 |
| Min. Tractor HP required | 55 |
| Min. Lifting capacity 610 mm behind the lifting eyes (kg) | 1650 |
| Min. Lifting capacity 24 inch behind the lifting eyes (lbs) | 3600 |
| Max. capacity with spacing 65 mm (m² hr) | 1470 |
| Max. capacity with spacing 2 1 2 inch (ft² hr) | 13400 |
| Three-point hitch | 3-point CAT 2 |
| Rpm Max. | 500 |
| Gear case oil | 80W90 - 5.8 |
| Lubricant | EP2 |
| Slip clutch setting | 800 Nm |