


## Verti-Drain® 2216

The robust Verti-Drain® 2216 is a high-speed unit, capable of handling a 24mm / 1" diameter tine and working to depths of 22cm / 9". Thanks to its heavy-duty construction, the 2216 is ideal for a range of creation applications where durability and speed is key.

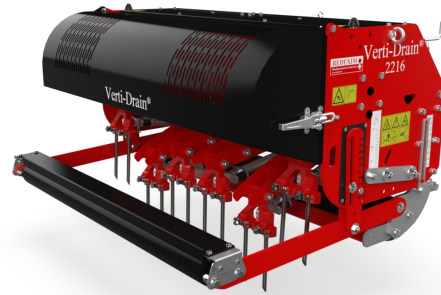

Specifications	
SKU	111.122.016
Working width (m)	1.6
Working width (inch)	63
Max. Working depth (mm)	225
Max. Working depth (inch)	9
Working speed at hole spacing 65 mm	1.79
Working speed at hole spacing 2-1 2 inch (mph)	1.1
Weight (kg)	952
Weight (lbs)	2094
Hole distance with 12 mm tines (mm)	65
Hole distance with 1 2 x 6 inch tines (inch)	2.5
Hole distance with 18 mm tines (mm)	130
Hole distance with 3 4 x 9 inch tines (inch)	5.11
Hole spacing distance driving direction (mm)	25 - 195
Hole spacing distance driving direction (inch)	1 - 7.5
Max diameter solid tine (mm)	24 x 225
Max diameter solid tine (inch)	1 x 9
Max diameter hollow tine (mm)	25 x 225
Max diameter hollow tine (inch)	1 x 9
Min. Tractor HP required	45
Min. lifting capacity (kg)	1050
Min. lifting capacity (LBS)	2314
Max. capacity with spacing 65 mm (m <sup>2</sup> hr)	2796
Max. capacity with spacing 2-1 2 inch (ft <sup>2</sup> hr)	30096
Three-point hitch	3-Point CAT 1/2
Rpm Max.	540
Gearbox oil	80W90 5.5 Liter
Lubricant	EP 2
Dimensions (width mm)	1700
Dimensions (height mm)	900
Dimensions (length mm)	1210
Dimensions (width inch)	66.9
Dimensions (height inch)	35.4
Dimensions (length inch)	47.6